

Product Data Sheet

☎ 1-855-276-(KPPA) 5772 or 780-702-7577
 📧 info@kpperformance.com
 ✉ 9850 W 190th St, Suite F, Mokena, IL 60448



KPPA-900DP-90S-PMP

AP Sector Antenna, Dual Slant, 824-928MHz, 90deg, 12.5dBi

- Wide band, high gain and dual polarization
- Clean patterns and high front-to-back ratio for frequency reuse

Electrical Specification

Frequency Band	MHz	824—900	900—928
Gain	dBi	10±0.5	12.5±0.5
Polarization		Slant (±45°)	Slant (±45°)
Horizontal HPBW	Degree	86±2	90±1
Horizontal Squint	Degree	±2	±2
Vertical HPBW	Degree	19.5±1	18.5±0.5
Electrical Downtilt	Degree	<1	<1
Front-to-Back Ratio @ 180°	dB	25	28
Front-to-Back Ratio @ 180°±30°	dB	22	25
Cross-polarization Ratio at Boresight	dB	18	20
Cross-polarization Ratio over HPBW	dB	15	16
VSWR		1.2 typ 1.5 max	1.2 typ 1.5 max
Return Loss	dB	21 typ 14 max	21 typ 14 max
Port-to-Port Isolation	dB	20	25
Max. Input Power per Port	W	50	50
Impedance	Ohms	50	50

Mechanical Specifications

RF Connector Type	Type N Female
RF Connector Quantity	2
RF Connector Position	Bottom of radome
Electrical Grounding	RF connector grounded to reflector and mounting bracket
Radome Material	UV resistant PVC
Ingress Protection	IP55 rain and dust resistant
Wind Load, frontal	240N @ 160km/h 54 lbf @ 100mph
Max. Wind Speed	160km/h 100mph
Temperature Range	-40° to +60° C -40° to +140° F

Bracket Specifications

Material Type	Hot Dipped Galvanized Steel
Mechanical Tilt (Degree)	-2 – 10
Mounting Type	Pipe Mount
Mounting pole diameter	25 mm – 89 mm 1¼ in – 3 ½in
Antenna-to-Pipe Distance	131 mm 5 in
Bracket-to-Bracket Distance	762 mm 30 in

ANTENNAS ENGINEERED & MANUFACTURED TO EXCEED INDUSTRY STANDARDS

Product Data Sheet

☎ 1-855-276-(KPPA) 5772 or 780-702-7577
 📧 info@kpperformance.com
 ✉ 9850 W 190th St, Suite F, Mokena, IL 60448




Sector Dimensions

Length	940 mm		37 in
Width	280 mm		11 in
Height	127 mm		5 in
Net Weight, with brackets	5.4 kg		17 lb

Package Dimensions

Length	990 mm		39 in
Width	355 mm		14 in
Height	254 mm		10 in
Net Weight	9.1 kg		20 lb

Graphical Data

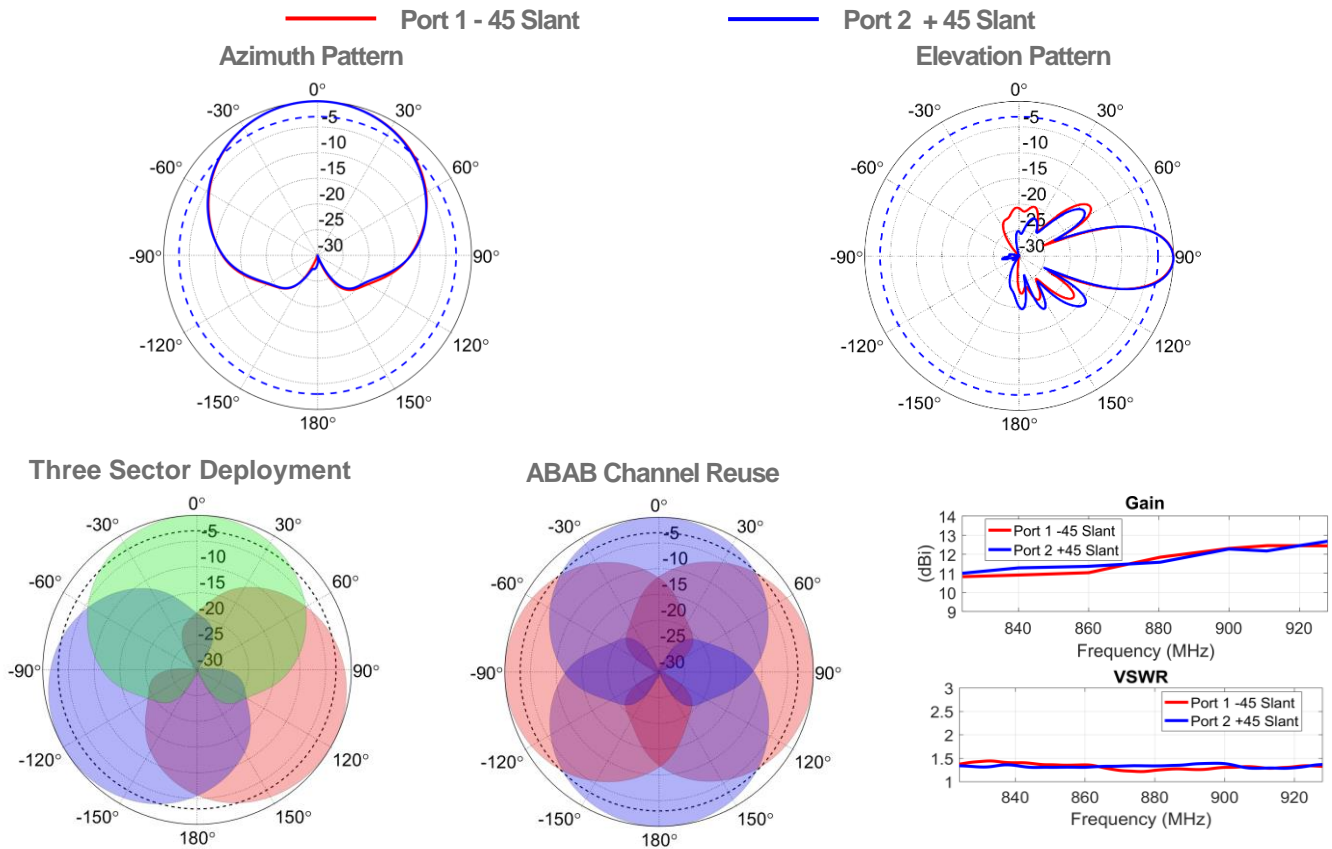

Appendix

HPBW: Average and variation of the antenna's 3dB beamwidth (half power beamwidth) in its horizontal (Azimuth) or vertical (Elevation) pattern.
Horizontal Squint: Angle in the antenna's azimuth pattern in which the maximum gain occurs. Reported is the maximum variation in the frequency band.
Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.
Gain: Antenna's average gain and variation in each frequency band.
Front to Back Ratio @ 180°: Difference between the antenna's maximum gain and the gain directly behind the antenna ($\theta=180^\circ$).
Front to Back Ratio @ $180^\circ \pm 30^\circ$: Difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over $\pm 30^\circ$ angles.
Cross polarization at boresight: Difference between the co-polarization and cross-polarization gain at 0° (boresight).
Cross-polarization Ratio over HPBW (dB): Maximum difference between the co-polarization and cross-polarization gain across the sector's HPBW.

ANTENNAS ENGINEERED & MANUFACTURED TO EXCEED INDUSTRY STANDARDS